



**SPLIT SYSTEM HEATING
AND COOLING SOLUTIONS
FROM DAIKIN**

Energy efficient heating and cooling solutions for your home



CHOOSING THE RIGHT *Split System* FOR YOUR HOME...

WALL MOUNTED UNITS.

Daikin's wall mounted units are a natural choice for those wanting the comfort of a unit that blends with its surroundings.

The design of the unit also allows for easy cleaning – the smooth surfaces can be simply wiped clean.

Daikin's air purifying filters and innovative airflow systems enable fresh, clean air to flow to every corner of the room.

- **Reverse cycle (heating & cooling) or cooling-only models**
- **24hr, 7 day on/off timer**
- **Energy efficient**
- **Quiet operation**
- **Range from 2KW-9.5KW**

FLOOR STANDING UNITS.

Daikin's floor standing units are compact and ideal for anyone wanting the convenience and access of positioning their unit closer to the floor. They can even be semi-recessed into the wall or in an unused fireplace.

The units use either top, or top and bottom discharge vents to distribute air evenly through the room.

- **Reverse cycle (heating & cooling)**
- **Energy efficient**
- **Quiet operation**
- **Standby power function**
- **Range from 2.5KW-7.1KW**

WITH DAIKIN
Split Systems,
 YOU'RE MAKING A
Sensitive Choice.



DID YOU KNOW... DAIKIN IS THE ONLY SPLIT SYSTEM AIR CONDITIONER AUTHORISED TO DISPLAY THE ASTHMA COUNCIL SENSITIVE CHOICE BUTTERFLY SYMBOL?



SENSITIVE CHOICE

The National Asthma Council Australia and the Asthma Foundation New Zealand introduced the Sensitive Choice® program to help people identify products that are better suited for people with asthma and allergies. They chose Daikin as the only split system air conditioner authorised to display the Sensitive Choice butterfly symbol.

DOUBLE ACTION

All Daikin Split Systems have been fitted with an air-purifying filter. Most of these split systems are fitted with a more advanced Titanium Apatite Photocatalytic Air-Purifying filter. These filters not only trap most microscopic airborne particles, but also assist to decompose odours, absorb and deactivate bacteria and viruses.

ADVANCED FILTERS

Daikin Split System air conditioners have advanced air-purifying filters that may help to reduce some of the triggers that affect people with asthma and allergies and help to provide a cleaner and healthier indoor environment.

Daikin Air Purifiers
A Sensitive, Smart Choice



Daikin Air Purifiers produce air that is both cleaner and fresher. The technology of a negative ion generator aids the removal of pollutants, dust particles and other airborne matter from the air in your home. A Daikin Air Purifier's enhanced performance is due to an advanced seven layer filtering system.

Approved by the National Asthma Council Australia and Asthma Foundation (NZ), Daikin Air Purifiers are authorised to display the Sensitive Choice butterfly symbol.

Air Purifier Filters:

1. Prefilter
2. Bio-antibody filter
3. Plasma ionizer
4. Flash streamer unit
5. Electrostatic dust collection filter
6. Titanium apatite photo-catalytic filter
7. Streamer deodorising catalyst



*Daikin Air Purifiers come with a 1 year warranty.



Controllers



Backlit Wireless Remote Controller

This remote controller with a backlit liquid crystal display and luminescent control button, also features a built-in weekly time clock that can be programmed on or off to suit your personal lifestyle with up to four actions per day of the week. This advanced controller not only allows you to program on/off time, but also the desired temperature. Furthermore, the copy function enables any daily program to be replicated on any other day or days as required.

Applicable to FVXS, FTXS and FTKS ranges.



LCD Wireless Remote Controller

This remote controller puts superior comfort at your fingertips. Frequently used buttons are instantly accessible while other buttons are under the cover of the remote. A large liquid crystal display panel makes it easy to read the settings and the on/off button has a raised dot so that you can feel it in the dark.

Applicable to FTYN, FTN ranges.



Ururu Sarara Remote Controller

The Ururu Sarara comes with a user-friendly remote control that clearly and legibly displays the various functions including room humidity level and temperature setting.

Applicable to FTXR range.

FEATURES CHECKLIST	FLOOR STANDING UNIT	WALL MOUNTED UNIT		
	INVERTER	INVERTER		HYBRID
Reverse Cycle (heating & cooling)	FVXS25K FVXS35L FVXS50L FVXS60L FVXS71L	FTXR28K FTXR42K FTXR50K	FTXS20L FTXS25L FTXS35L FTXS46L FTXS50L FTXS60L FTXS71L FTXS85L FTXS95L	FTYN25K FTYN35KA
Cooling Only			FTKS20L FTKS25L FTKS35L FTKS50L FTKS60L FTKS71L	FTN25K FTN35KA
	✓	✓	✓	
 Standby Power Function	✓		✓	✓
 Power-Airflow Dual Flaps		✓	✓	✓
 Wide-Angle Louvres	✓	✓	✓	✓
 Vertical Auto-Swing (up and down)	✓	✓	✓	✓
 Horizontal Auto-Swing (left and right)		✓	✓	✓
 3-D Airflow		✓	✓	✓
 Comfortable Mode		✓	✓	✓
 Indoor Unit Quiet Operation	✓	✓	✓	✓
 Outdoor Unit Quiet Operation	✓		✓	
 Intelligent Eye			✓	✓
 Automatic Operation	✓	✓	✓*	✓*
 Program Dry Function	✓		✓	✓
 Auto Fan Speed	✓	✓	✓	✓
 Hot Start	✓	✓	✓*	✓*
 Titanium Apatite Photocatalytic Air-Purifying Filter	✓	✓	✓	✓
 Air-Purifying Filter	✓	✓	✓	✓
 Wipe Clean	✓	✓	✓	✓
 Econo Mode	✓		✓	
 Powerful Operation (Inverter & Non Inverter)	✓	✓	✓	✓
 LCD Wireless Remote Control	✓	✓	✓	✓
 Indoor Unit On/Off Switch	✓	✓	✓	✓
 24-Hour On/Off Timer	✓	✓	✓	✓
 Weekly Timer	✓		✓	
 Night Set Mode	✓	✓	✓	✓
 Auto-Restart after Power Failure	✓	✓	✓	✓
 Self-Diagnosis with Digital Display	✓	✓	✓	✓
 Anticorrosion Treatment of Outdoor Heat Exchanger Fin	✓	✓	✓	✓

*Only available in Heating & Cooling Models.

Features and Benefits*

SUPERIOR COMFORT

Program Dry Function. The system rids the room of humidity while maintaining the temperature as much as possible. It automatically controls temperature and airflow rate and will switch into cooling mode if the room temperature increases too much.

Indoor Unit Quiet Operation Function. Sound levels are reduced by 2-3 decibels (dB) from the low fan speed for quieter heating and cooling.**

Outdoor Unit Quiet Operation Function. Outdoor unit sound levels can be reduced by 3dB for times when quieter operation is needed.**

Intelligent Eye. This is an infrared motion sensor with the ability to sense movement in the room. When you are in the room, the air conditioner operates normally. If you leave the room for more than 20 minutes the air conditioner automatically changes to an energy-saving operation.

Automatic Operation (reverse cycle only). For year-round comfort, this function allows the unit to automatically switch between heating and cooling modes as required.

Auto Fan Speed. To reduce operating noise, the fan speed is automatically controlled by the micro-processor to suit the thermostat setting and prevailing room temperature.

COMFORTABLE AIRFLOW

Comfortable Mode. The new flap changes the delivery angle to horizontal for cooling and vertical for heating operation, to prevent cold or warm air from blowing directly onto your body.

3-D Airflow. Combines vertical and horizontal auto-swing to circulate cool/warm air to the corners of large spaces.

HEALTHY AND CLEAN

Air-Purifying Filter. Traps microscopic particles and decomposes odours to purify the air in your room.

ECONOMICAL

Econo Mode. Controls the upper limit of frequency, reducing power consumption. This reduces the load on the electrical circuit when multiple electrical devices are used simultaneously.**

Night Set Mode. Through the use of the 'Timer-OFF Circuit', the preset room temperature gently rises in cooling or falls in heating before the unit stops. This energy efficient feature allows you to sleep comfortably without feeling a sudden change in the room temperature.

Inverter Powerful Operation. Pushing the POWERFUL button on the remote control gives you a boost in cooling and heating power for a 20-minute period, even if the unit is already operating at high capacity.

Standby Power Function. When the air conditioner is not in use, the standby power function turns off power supply to the outdoor unit and sets the indoor unit into standby electricity saving mode, reducing energy consumption.

CONVENIENT

24-Hour On/Off Timer. The timer can be preset to start and stop the air conditioner at any time within a 24-hour period. Once the times are set, the air conditioner can be operated for a period by simply pressing the ON or OFF timer buttons.

Weekly Timer. This function makes it easy to enter up to four settings per day for each day of the week. It not only allows you to program on and off time, but also the desired temperature.

EASY TO OPERATE

Self-Diagnosis. In the event that a problem develops with the unit, malfunction codes can be displayed on the liquid crystal panel of the remote control for fast and easy fault diagnosis.

Auto-Restart. The unit memorises the operation mode, airflow and temperature settings. Should there be a power failure when the unit is in operation, it will automatically return to the same operating conditions when the power is restored.

PROTECTION

Anti-Corrosion. The special anti-corrosion coating on the outdoor unit heat exchanger ensures greater resistance to salt damage and atmospheric corrosion. Protection of the entire outdoor unit is available at an additional cost.

OPTIONS

Centralised Control. Centralised control of up to five systems is possible using a central control panel and an optional wiring adaptor.

External ON/OFF Control. Control of the system by an external field-supplied time clock is possible with an optional wiring adaptor PCB.

* Not all features available on all models. Please refer to checklist on page 4.
** Reducing noise will reduce capacity slightly.

URURU SARARA



The air conditioner that cools, heats, humidifies, dehumidifies, purifies and ventilates.

Modern air conditioners not only cool, but heat the air as well. You can adjust the temperature in your home all year round with one system. But there can be more than just pleasant temperature needed to enjoy a comfortable indoor climate. Precise adjustment of both the humidity level and ventilation in a room is also important, however this has not been possible with conventional air conditioners.

Until now...

Daikin's new Ururu Sarara split system air conditioning system can humidify and dehumidify, ventilate and purify the indoor air - all at the same time. The ideal solution for ideal living comfort in all seasons. Perfect, just the way you like it.

The Ururu Sarara is not your average split system air conditioner. This system controls the temperature and ventilation as well as humidity levels.

HUMIDIFICATION

Homogeneous indoor air quality

Humidification (called 'Ururu' in Japanese) is created by absorbing moisture from the outdoor air. The humidified outdoor air streams into the indoor unit and is evenly distributed throughout the indoor areas. Apart from enhancing the feeling of warmth, extra humidity reduces the feeling of dry skin.

DEHUMIDIFICATION

Without a drop in temperature

During summer, a high degree of ambient air humidity, even at moderate temperatures can make a room feel hot and stuffy. The Sarara dehumidification system reduces indoor humidity, without affecting the room temperature, by mixing cool, dry air with warm air. This will particularly benefit people sensitive to the cold.

VENTILATION

Fresh air, even with closed windows

Unlike a conventional air conditioner, the Ururu Sarara brings fresh air into the room. The Ururu Sarara is the first residential air conditioning system in Australia that can fill a room of 26 m² with fresh air in less than two hours. Furthermore, the temperature of the incoming air is brought to the desired level. The air supply fan is located in the outdoor unit, which minimises indoor noise.

AIR PURIFICATION

Non-stop purified air

The Ururu Sarara purifies the incoming air in two stages: first in the outdoor unit, and then in the indoor unit. Exhaust gases and unpleasant odours are broken down and removed by the outdoor unit before the air streams into the indoor unit. Air is then further purified in the indoor unit through dust and pollen filtration. The photocatalytic air purification filter helps to break down odours such as cigarette smoke and cooking smells. Finally, the Flash Streamer gives the air its last treatment, helping to break down formaldehyde and moulds.

IMPROVED INDOOR ENVIRONMENT

The 'hydration' mode combines a high and controlled relative humidity level together with a comfortable air flow. Thanks to the 'cooling breeze' airflow, your room will feel cool, even with a relatively high temperature setting. By oscillating the direction of the airflow, it creates the feeling of a pleasantly cool breeze. The 'comfort sleep' mode adapts the temperature fluctuations to those that the body experiences at night.

ENERGY EFFICIENT

Daikin's inverter technology adjusts the power used to suit the actual requirement, providing both comfort and energy efficiency. The system continually adjusts its cooling and heating output to suit the temperature in the room. The inverter shortens the system start-up time, enabling the required room temperature to be reached more quickly. As soon as the desired temperature is reached, the inverter ensures that it is constantly maintained.




WALL MOUNTED INVERTER

Reverse Cycle

INDOOR UNIT		FTXR28KVMA	FTXR42KVMA	FTXR50KVMA
OUTDOOR UNIT		RXR28KVMA	RXR42KVMA	RXR50KVMA
Rated Capacity	Cool (kW)	2.8	4.2	4.9
	Heat (kW)	3.6	5.1	5.9
Capacity Range	Cool (kW)	1.55-3.60	1.55-4.60	1.55-5.50
	Heat (kW)	1.3-5.00	1.3-5.60	1.3-6.20
Indoor Airflow Rate (Hi)	Cool (l/s)	185	206	222
	Heat (l/s)	206	215	233
Indoor Fan Speeds		5 steps, quiet and automatic		
Energy Label/ Star Ratings	Cool	4	2.5	1.5
	Heat	4.5	3.5	3
Front Panel Colour		White	White	White
Power Supply		1 phase, 220-240 50Hz		
Power Input (Rated)	Cool (kW)	0.57	1.07	1.47
	Heat (kW)	0.71	1.17	1.49
E.E.R./C.O.P.	Cool/Heat	4.86/5.03	3.93/4.34	3.32/3.97
A.E.E.R./A.C.O.P.	Cool/Heat	4.37/4.63	3.7/4.13	3.18/3.81
Dimensions (HxWxD)	Indoor (mm)	305 x 890 x 209	305 x 890 x 209	305 x 890 x 209
	Outdoor (mm)	693 x 795 x 285	693 x 795 x 285	693 x 795 x 285
Weight	Indoor (kg)	14	14	14
	Outdoor (kg)	48	48	48
Compressor Type		Hermetically sealed swing type		
Refrigerant Type		R410A	R410A	R410A
Max Pipe Length	(m)	10	10	10
Max Level Difference	(m)	8	8	8
Pipe Sizes	Liquid (mm)	6.4	6.4	6.4
	Gas (mm)	9.5	9.5	9.5
Outdoor Operating Range (outdoor temp)	Cool (CDB)	10 to 43	10 to 43	10 to 43
	Heat (CWB)	-20 to 18	-20 to 18	-20 to 18
Indoor Sound Level (H/SL)	Cool (dBA)	39/23	42/24	44/26
	Heat (dBA)	41/25	42/26	44/28
Outdoor Sound Level (H/L)	Cool (dBA)	46	48	48
	Heat (dBA)	46	48	50
EPA Sound Power Level	Outdoor (dBA)	60	62	62

Please refer to notes on page 16.

The **NEW** L-Series

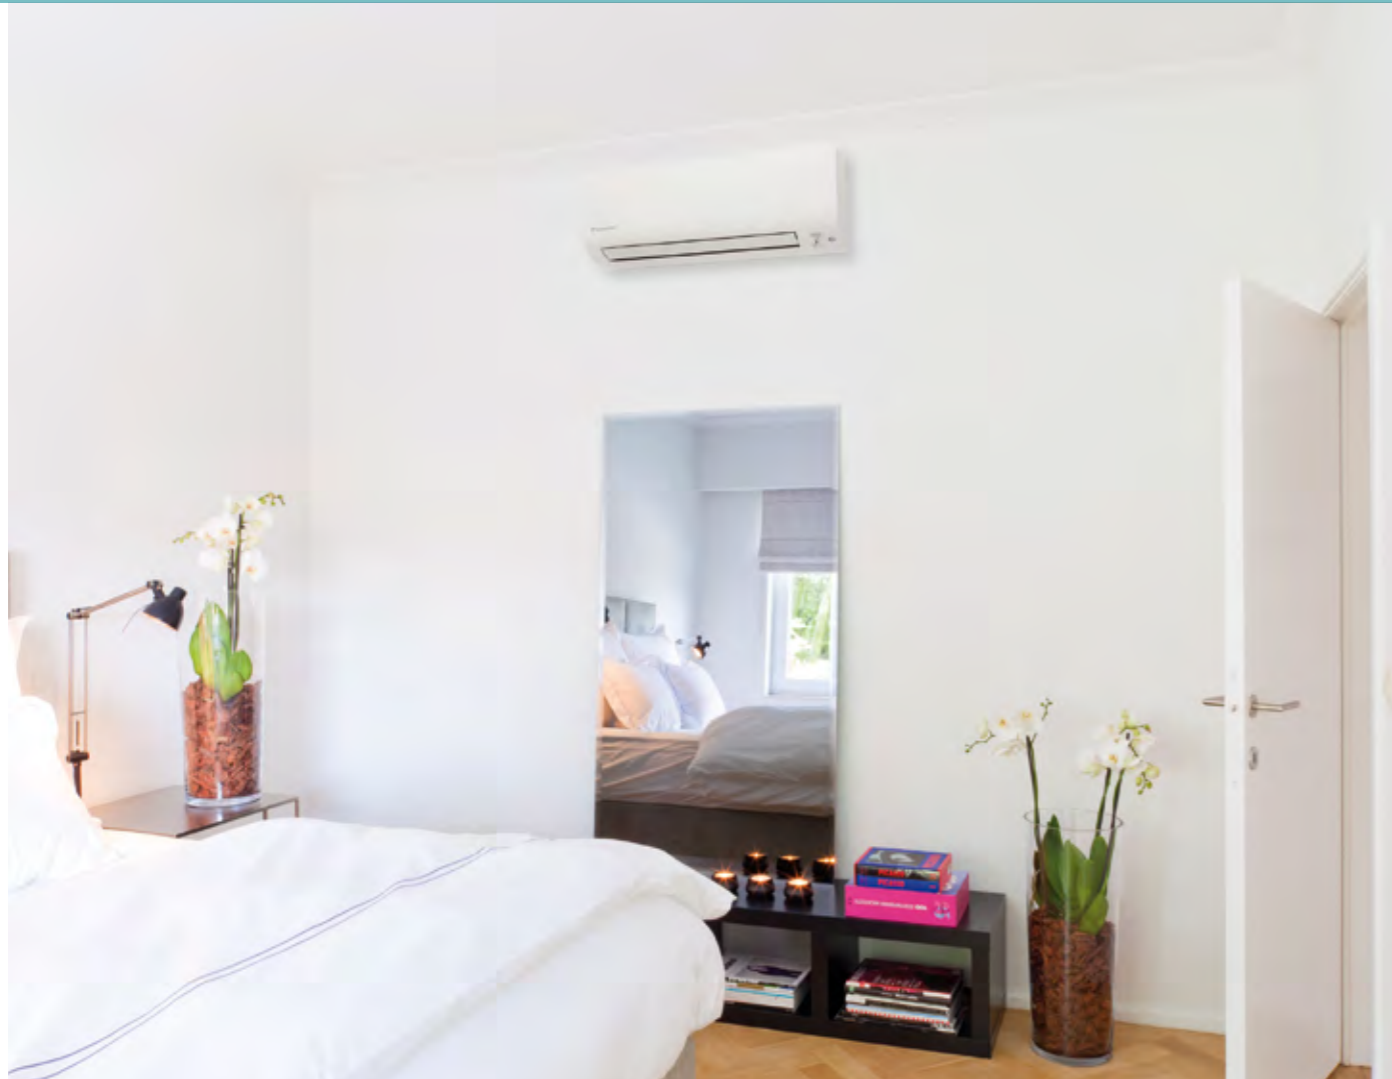

The most energy efficient Daikin Split System

Enjoy the comfort of the new L-Series with the highest energy efficiencies rating ever made by Daikin. Features include:

- Intelligent eye to reduce power consumption when no activity is detected in a room (FTXS only)
- Comfort airflow mode and 3-D airflow to provide a "draught free" room
- Hot start and automatic defrost function to deliver optimal heating performance
- Air-purifying filters on indoor units, approved by the National Asthma Council Australia's Sensitive Choice program
- Night quiet mode and quiet indoor operation
- Standby power saving function to reduce consumption when not in use
- Inverter DC motor efficiency giving greater efficiency when not under 100% load



WALL MOUNTED INVERTER

Cooling Only

NEW L-Series

INDOOR UNIT		FTKS20LVMA	FTKS25LVMA	FTKS35LVMA	FTKS50LVMA	FTKS60LVMA	FTKS71LVMA
OUTDOOR UNIT		RKS20LVMA	RKS25LVMA	RKS35LVMA	RKS50LVMA	RKS60LVMA	RKS71LVMA
Rated Capacity	Cool (kW)	2	2.5	3.5	5	6	7.1
	Heat (kW)	-	-	-	-	-	-
Capacity Range	Cool (kW)	1.3-2.8	1.3-3.2	1.4-4.0	1.7-6.0	1.7-6.7	2.3-8.5
	Heat (kW)	-	-	-	-	-	-
Indoor Airflow Rate (Hi)	Cool (l/s)	162	177	188	305	320	352
	Heat (l/s)	-	-	-	-	-	-
Indoor Fan Speeds		5 steps, quiet and automatic					
Energy Label/ Star Ratings	Cool	4	4.5	3	3	2.5	2
	Heat	-	-	-	-	-	-
Front Panel Colour		White	White	White	White	White	White
Power Supply		1 phase, 220-240, 50Hz					
Power Input (Rated)	Cool (kW)	0.45	0.54	0.91	1.32	1.69	2.08
	Heat (kW)	-	-	-	-	-	-
E.E.R./C.O.P.	Cool/Heat	4.44	4.63	3.85	3.79	3.55	3.41
A.E.E.R./A.C.O.P.	Cool/Heat	4.37	4.56	3.82	3.77	3.53	3.40
Dimensions (HxWxD)	Indoor (mm)	295x800x215	295x800x215	295x800x215	340x1050x248	340x1050x248	340x1050x248
	Outdoor (mm)	550x765x285	550x765x285	550x765x285	735x825x300	735x825x300	770x900x320
Weight	Indoor (kg)	9	10	10	14	14	14
	Outdoor (kg)	31	34	34	46	46	71
Compressor Type		Hermetically Sealed Swing Type					
Refrigerant Type		R410A	R410A	R410A	R410A	R410A	R410A
Max Pipe Length	(m)	20	20	20	30	30	30
Max Level Difference	(m)	15	15	15	20	20	20
Pipe Sizes	Liquid (mm)	6.4	6.4	6.4	6.4	6.4	9.5
	Gas (mm)	9.5	9.5	9.5	12.7	12.7	15.9
Outdoor Operating Range (outdoor temp)	Cool (CDB)	10 to 46	10 to 46	10 to 46	10 to 46	10 to 46	10 to 46
	Heat (CWB)	-	-	-	-	-	-
Indoor Sound Level (H/SL)	Cool (dBA)	38/22	40/22	42/23	46/32	48/33	49/34
	Heat (dBA)	-	-	-	-	-	-
Outdoor Sound Level (H/L)	Cool (dBA)	46/43	47/43	49/44	47/44	49/46	52/49
	Heat (dBA)	-	-	-	-	-	-
EPA Sound Power Level	Outdoor (dBA)	60	61	63	61	63	66

WALL MOUNTED INVERTER

Reverse Cycle

NEW L-Series



INDOOR UNIT		FTXS20LVMA	FTXS25LVMA	FTXS35LVMA	FTXS46LVMA	FTXS50LVMA
OUTDOOR UNIT		RXS20LVMA	RXS25LVMA	RXS35LVMA	RXS46LVMA	RXS50LVMA
Rated Capacity	Cool (kW)	2	2.5	3.5	4.6	5.0
	Heat (kW)	2.7	3.4	4.0	5.1	6.0
Capacity Range	Cool (kW)	1.3-2.8	1.3-3.2	1.4-4.0	1.7-5.3	1.7-6.0
	Heat (kW)	1.3-4.3	1.3-4.7	1.4-5.2	1.7-6.8	1.7-7.7
Indoor Airflow Rate (Hi)	Cool (l/s)	162	177	188	203	305
	Heat (l/s)	175	192	192	215	323
Indoor Fan Speeds		5 steps, quiet and automatic				
Energy Label/ Star Ratings	Cool	4	4.5	3	2.5	3
	Heat	4	5	4.5	2.5	3.5
Front Panel Colour		White	White	White	White	White
Power Supply		1 phase, 220-240, 50Hz				
Power Input (Rated)	Cool (kW)	0.45	0.54	0.91	1.25	1.32
	Heat (kW)	0.61	0.70	0.88	1.37	1.47
E.E.R./C.O.P.	Cool/Heat	4.44/4.43	4.63/4.86	3.85/4.55	3.68/3.72	3.79/4.08
A.E.E.R./A.C.O.P.	Cool/Heat	4.37/4.37	4.56/4.80	3.82/4.51	3.66/3.70	3.77/4.06
Dimensions (HxWxD)	Indoor (mm)	295x800x215				
	Outdoor (mm)	550x765x285	550x765x285	550x765x285	735x825x300	735x825x300
Weight	Indoor (kg)	9	10	10	10	14
	Outdoor (kg)	31	34	34	46	46
Compressor Type		Hermetically sealed swing type				
Refrigerant Type		R410A	R410A	R410A	R410A	R410A
Max Pipe Length (m)		20	20	20	30	30
Max Level Difference (m)		15	15	15	20	20
Pipe Sizes	Liquid (mm)	6.4	6.4	6.4	6.4	6.4
	Gas (mm)	9.5	9.5	9.5	12.7	12.7
Outdoor Operating Range (outdoor temp)	Cool (CDB)	10 to 46	10 to 46	10 to 46	10 to 46	10 to 46
	Heat (CWB)	-15 to 18	-15 to 18	-15 to 18	-15 to 18	-15 to 18
Indoor Sound Level (H/SL)	Cool (dBA)	38/22	40/22	42/23	44/32	46/32
	Heat (dBA)	39/25	40/25	42/26	42/30	45/30
Outdoor Sound Level (H/L)	Cool (dBA)	46/43	47/43	49/44	47/44	47/44
	Heat (dBA)	47/44	47/44	49/45	48/45	48/45
Sound Power Level (H)	Outdoor (dBA)	61	62	63	62	62

INDOOR UNIT		FTXS60LVMA	FTXS71LVMA	FTXS85LVMA	FTXS95LVMA
OUTDOOR UNIT		RXS60LVMA	RXS71LVMA	RXS85LVMA	RXS95LVMA
Rated Capacity	Cool (kW)	6.0	7.1	8.5	9.4
	Heat (kW)	7.0	8.0	9.0	10.5
Capacity Range	Cool (kW)	1.7-6.7	2.3-8.5	3.0-10.5	3.0-11.2
	Heat (kW)	1.7-8.0	2.3-10.0	3.0-11.2	3.0-11.7
Indoor Airflow Rate (Hi)	Cool (l/s)	320	352	397	378
	Heat (l/s)	354	360	401	415
Indoor Fan Speeds		5 steps, quiet and automatic			
Energy Label/ Star Ratings	Cool	2.5	2	2	2
	Heat	3.5	2.5	2.5	2
Front Panel Colour		White	White	White	White
Power Supply		1 phase, 220-240, 50Hz			
Power Input (Rated)	Cool (kW)	1.69	2.08	2.58	2.88
	Heat (kW)	1.73	2.18	2.51	3.22
E.E.R./C.O.P.	Cool/Heat	3.55/4.05	3.41/3.67	3.29/3.59	3.26/3.26
A.E.E.R./A.C.O.P.	Cool/Heat	3.53/4.01	3.40/3.66	3.29/3.57	3.25/3.25
Dimensions (HxWxD)	Indoor (mm)	340x1050x248	340x1050x248	340x1200x240	340x1200x240
	Outdoor (mm)	735x825x300	770x900x320	990x940x320	990x940x320
Weight	Indoor (kg)	14	14	17	18
	Outdoor (kg)	46	71	80	82
Compressor Type		Hermetically sealed swing type			
Refrigerant Type		R410A	R410A	R410A	R410A
Max Pipe Length (m)		30	30	30	30
Max Level Difference (m)		20	20	20	20
Pipe Sizes	Liquid (mm)	6.4	9.5	9.5	9.5
	Gas (mm)	12.7	15.9	15.9	15.9
Outdoor Operating Range (outdoor temp)	Cool (CDB)	10 to 46	10 to 46	10 to 46	10 to 46
	Heat (CWB)	-15 to 18	-15 to 18	-15 to 18	-15 to 18
Indoor Sound Level (H/SL)	Cool (dBA)	48/33	49/34	49/37	51/38
	Heat (dBA)	48/30	49/32	49/35	50/35
Outdoor Sound Level (H/L)	Cool (dBA)	49/46	52/49	54/51	54/50
	Heat (dBA)	52/46	53/49	55/51	55/51
Sound Power Level (H)	Outdoor (dBA)	63	67	69	69

WALL MOUNTED
HYBRID INVERTER
**Reverse Cycle and
Cooling Only**



		REVERSE CYCLE		COOLING ONLY	
INDOOR UNIT		FTYN25KV1A	FTYN35KAV1A	FTN25KV1A	FTN35KAV1A
OUTDOOR UNIT		RYN25KV1A	RYN35KAV1A	RN25KVMA	RN35KAVMA
Rated Capacity	Cool (kW)	2.5	3.5	2.5	3.5
	Heat (kW)	3.4	4.0	-	-
Indoor Airflow Rate (Hi)	Cool (l/s)	161	188	161	188
	Heat (l/s)	175	191	-	-
Indoor Fan Speeds		5 steps and automatic			
Energy Label/ Star Ratings	Cool	3	2.5	3	2.5
	Heat	3.5	3	-	-
Front Panel Colour		White	White	White	White
Power Supply		1 phase, 220-240V, 50Hz		1 phase, 220-240V, 50Hz	
Power Input (Rated)	Cool (kW)	0.63	0.99	0.63	0.99
	Heat (kW)	0.8	1.01	-	-
E.E.R./C.O.P.	Cool/Heat	3.97/4.25	3.54/3.96	3.97	3.54
A.E.E.R./A.C.O.P.	Cool/Heat	3.97/4.23	3.59/3.98	3.92	3.51
Dimensions (HxWxD)	Indoor (mm)	295x800x215	295x800x215	295x800x215	295x800x215
	Outdoor (mm)	550x765x285	550x765x285	550x765x285	550x765x285
Weight	Indoor (kg)	9	10	9	10
	Outdoor (kg)	34	34	34	34
Compressor Type		Hermetically sealed swing type		Hermetically sealed swing type	
Refrigerant Type		R410A	R410A	R410A	R410A
Max Pipe Length	(m)	20	20	20	20
Max Level Difference	(m)	15	15	15	15
Pipe Sizes	Liquid (mm)	6.4	6.4	6.4	6.4
	Gas (mm)	9.5	9.5	9.5	9.5
Outdoor Operating Range (outdoor temp)	Cool (CDB)	10 to 46	10 to 46	10 to 46	10 to 46
	Heat (CWB)	-10 to 20	-10 to 20	-	-
Indoor Sound Level (H/SL)	Cool (dBA)	38/22	42/23	38/22	42/23
	Heat (dBA)	39/25	42/26	-	-
Outdoor Sound Level (H/L)	Cool (dBA)	46	48	46	48
	Heat (dBA)	47	48	-	-
EPA Sound Power Level	Outdoor (dBA)	62	63	61	63



FLOOR STANDING INVERTER
Reverse Cycle

NEW L-Series

INDOOR UNIT		FVXS25KV1A	FVXS35LV1A	FVXS50LVMA	FVXS60LVMA	FVXS71LVMA
OUTDOOR UNIT		RXS25LAVMA	RXS35LAVMA	RXS50LAVMA	RXS60LAVMA	RXS71LAVMA
Rated Capacity	Cool (kW)	2.5	3.5	5.0	6.0	7.1
	Heat (kW)	3.3	4.4	5.8	7.0	7.65
Capacity Range	Cool (kW)	1.3-3.0	1.7-3.8	1.7-5.6	2.3-6.7	3.0-8.5
	Heat (kW)	1.3-4.5	1.7-5.0	1.7-8.1	2.3-9.0	3.0-10.0
Indoor Airflow Rate (Hi)	Cool (l/s)	136	142	260	289	273
	Heat (l/s)	146	157	285	285	317
Indoor Fan Speeds		5 steps, quiet and automatic				
Energy Label/ Star Ratings	Cool	3.5	3	3	2.5	2
	Heat	3.5	3	2.5	2	2
Front Panel Colour		White	White	White	White	White
Power Supply		1 phase, 220-240V, 50Hz				
Power Input (Rated)	Cool (kW)	0.59	0.92	1.30	1.70	2.13
	Heat (kW)	0.79	1.17	1.59	2.03	2.21
E.E.R./C.O.P.	Cool/Heat	4.17/4.22	3.80/3.78	3.85/3.65	3.53/3.45	3.33/3.46
A.E.E.R./A.C.O.P.	Cool/Heat	4.12/4.18	3.77/3.75	3.82/3.63	3.51/3.44	3.32/3.45
Dimensions (HxWxD)	Indoor (mm)	600x700x210	600x700x210	770x850x290	770x850x290	770x850x290
	Outdoor (mm)	550x765x285	735x825x300	735x825x300	770x900x320	990x940x320
Weight	Indoor (kg)	14	14	25	25	25
	Outdoor (kg)	34	46	46	71	80
Compressor Type		Hermetically sealed swing type				
Refrigerant Type		R410A	R410A	R410A	R410A	R410A
Max Pipe Length	(m)	20	30	30	30	30
Max Level Difference	(m)	15	20	20	20	20
Pipe Sizes	Liquid (mm)	6.4	6.4	6.4	6.4	9.5
	Gas (mm)	9.5	12.7	12.7	12.7	15.9
Outdoor Operating Range (outdoor temp)	Cool (CDB)	10 to 46	10 to 46	10 to 46	10 to 46	10 to 46
	Heat (CWB)	-15 to 20	-15 to 20	-15 to 18	-15 to 18	-15 to 18
Indoor Sound Level (H/SL)	Cool (dBA)	38/23	39/24	45/32	47/33	46/33
	Heat (dBA)	38/23	39/24	45/32	45/33	47/34
Outdoor Sound Level (H/L)	Cool (dBA)	46/43	47/44	47/44	49/46	52/49
	Heat (dBA)	47/44	48/45	48/45	49/46	54/50
EPA Sound Power Level	Outdoor (dBA)	61	62	62	63	68

TECHNOLOGY

THAT DELIVERS **comfort** AND **energy efficiency** FOR YOUR HOME



DAIKIN'S INVERTER DIFFERENCE

Daikin inverter air conditioners are more powerful and more energy efficient than conventional, non-inverter models. Conventional air conditioners operate at a fixed speed, delivering a fixed amount of cooling and heating. A Daikin inverter has advanced technology that operates more intelligently. The principle is simple: inverters adjust the power to suit your actual requirements – no more, no less.

The inverter continuously adjusts its cooling and heating output in accordance with the temperature in the room. When the desired temperature is reached, inverter technology ensures it is constantly maintained – keeping you comfortable at the same time as running more efficiently.

HYBRID EXPLAINED

Daikin's Hybrid Split System combines technologies from both the inverter and traditional non inverter systems. Like a non inverter, the Hybrid Split System operates at its rated capacity and as the room temperature reaches the desired level, the system uses the intelligence of inverter technology to steadily maintain your desired temperature setting.

WORKING QUIETLY

Comfort is not only enjoying the desired temperature in a room or space, it is also a quiet, peaceful environment. Daikin's swing compressor reduces friction for smoother and quieter operation.

ENERGY STAR® NEW ZEALAND

Daikin air conditioning is an ENERGY STAR® partner in New Zealand with a range of ENERGY STAR® qualified heat pumps. Only the most energy efficient heat pumps, in both heating and cooling modes, qualify for the ENERGY STAR® label.

For more information visit www.energywise.govt.nz



WHY CHOOSE A **Daikin Specialist Dealer**



Like us, our Dealers are specialists. Their expertise ensures you get all the air conditioning help and advice you need.

A Daikin Specialist Dealer will devote time and effort to ensure you choose the right air conditioner for your individual needs.

This is critically important, having an air conditioner that is too small for the job means you'll be short on comfort; buying a model that's too big for your space means big energy bills. Your Daikin Specialist Dealer will recommend a size that's just right for you.

As well as great advice, your Daikin Specialist Dealer will give you one great price covering the cost of the air conditioner plus installation.

And when your air conditioner is up and running they'll give you a thorough demonstration to ensure you get maximum comfort from your investment.

You've also got the support of one of the world's leading air conditioning brands with a large service network on hand to help.

Daikin also has an established service department, including an in house call centre, spare parts division and technical support centre for all technical enquiries, ensuring prompt after sales support for all our customers.

DAIKIN **Get it Right** FIRST TIME

4 STEPS TO A SUCCESSFUL INSTALLATION

OVER 450 DAIKIN SPECIALIST DEALERS ACROSS AUSTRALIA AND NEW ZEALAND READY TO HELP YOU FIT THE RIGHT AIR CONDITIONING SOLUTION FOR YOUR HOME - BIG OR SMALL.

1 Trust a Daikin Specialist Dealer

Selecting a Daikin Specialist Dealer will help you obtain an efficient, reliable installation with the best possible service and advice for getting the right Split System.

2 Measure, Quote and Install

Your Daikin Specialist Dealer will come to your home to carefully evaluate your needs and will then provide you with a detailed cost estimate. Next is the installation stage. Here your Daikin Specialist Dealer is your assurance that the work will be performed cleanly, quickly and safely.

3 Daikin's 5 Year Warranty

The Daikin 5 year parts and labour warranty applies to Split Systems in this brochure, purchased and installed in Australia or New Zealand.



4 Maintenance

For your peace of mind, entrust the regular maintenance of your system to a Daikin Specialist Dealer - this way, you will optimise the performance and longevity of your unit.

NOTES:

1. The Rated Capacity, Power Input and Running Current are determined under conditions T1 (cooling) or H1 (heating) of AS/NZS 3823.1.1.
2. The cooling (or heating) output capacity will be reduced below the rated value as the outdoor temperature approaches the maximum (or minimum) outdoor temperature operating range limit.
3. Indoor unit sound levels are determined in an anechoic chamber at a distance of 1 metre from the front of the unit. They are normally higher during actual operation due to ambient conditions.
4. Inverter air conditioners do not have a current surge during start up. The compressor start current of an inverter air conditioner is typically lower than specified running current.
5. The specifications, designs and information in this brochure are subject to change without notice. Unit colours shown are as close as possible to actual unit colours. Colours depicted in this brochure may vary slightly.

AIR CONDITIONING MADE
easy WITH DAIKIN

AIR CONDITIONING: WHAT TO LOOK FOR

NOW THAT YOU'VE READ THIS BROCHURE YOU SHOULD HAVE A BASIC UNDERSTANDING OF ALL THE BENEFITS OF A DAIKIN AIR CONDITIONER. HERE ARE SOME QUICK HINTS AND TIPS TO HELP YOU WITH YOUR DECISION AND ENSURE YOU GET THE RIGHT AIR CONDITIONER FOR YOUR NEEDS.

- ✓ **Get the right size air conditioner for your home** – When you're buying an air conditioner, it's very important to seek expert advice. A Daikin Specialist Dealer is a great place to start. They will devote the time and effort to ensure you choose the right air conditioner for your individual needs.
- ✓ **Energy efficiency** – Daikin's advanced and innovative technology ensures your air conditioner is one of the most energy efficient units available. A Daikin Specialist Dealer will ensure you choose the most energy efficient air conditioner for the size of your room or home.
- ✓ **Professional installation** – Daikin's Specialist Dealer network does it all, offering you one great price covering the cost of the air conditioner plus installation. Your Daikin Specialist Dealer will make sure whatever air conditioner you select is professionally installed so it works quietly and efficiently.
- ✓ **Certified operation in extremes** – When climatic conditions are extreme, either at their coldest or at their hottest, that's when you need your air conditioner the most. So when it's really cold, you're really warm and when it's uncomfortably hot, you're comfortably cool. Inverter models are very reliable even when temperatures are extreme. A Daikin Air Conditioner is certified to operate when temperatures soar as high as 46°C (cooling) or fall as low as minus 15°C (heating).
- ✓ **Noise level considerations** – It's very important to consider the noise level of an air conditioner. Either inside or outside, noise level should be minimal.

*Excludes models FTYN25K and FTYN35K which operates at minus 10.



Assumptions

All representations made in Daikin marketing and promotional material are based on the assumptions that the correct equipment has been selected, appropriately sized and installed in accordance with Daikin's installation instructions and standard industry practises.

Head Office / Tokyo Office Certificate number: EC02J0355

Shiga Plant (Japan) Certificate number: EC99J2044

Sakai Plant (Japan) Certificate number: JQA-E-80009

Daikin Industries Ltd (Thailand) Certificate number: JQA-E-90108

Yodogawa Plant (Japan) Certificate number: EC99J2057

Environmental Qualifications

Daikin Industries Limited has received ISO 14001 Environmental Certification for the Daikin production facilities listed below. ISO 14001 is an international standard specifying requirement for an environmental management system, enabling an organisation to formulate policy and objectives, taking into account legislative requirements and information about significant environmental impacts. It applies to those environmental aspects within the organisation's control and over which it can be expected to have an influence.

Quality Certifications

Daikin Industries Limited is the first air conditioning equipment manufacturer in Japan to receive the ISO 9001 certification. All Daikin manufacturing facilities have been certified to ISO 9001 Quality Management System requirements. ISO 9001 is a certificate for quality assurance concerning 'design, development, manufacturing, installation and related service' of products manufactured at that factory.

The certification relates only to the environmental management system and does not constitute any endorsement of the products shipped from the facility by the International Organisation for Standardisation.



Residential Air Conditioning

Manufacturing Div (ISO 9001)

JQA-0486 May 2, 1994 (Shiga Plant)

Commercial Air Conditioning and Refrigeration

Manufacturing Div (ISO 9001)

JMI0107 December 28, 1992 (Kanaoka Factory and Rinkai Factory at Sakai Plant)

Industrial System and Chiller Products

Manufacturing Div (ISO 9001)

JQA-0495 May 16, 1994 (Yodogawa Plant and Kanaoka Factory and Kishiwada Factory)

Daikin Europe N.V (ISO 9001)

Lloyd 928589.1 June 2, 1993

Daikin Industries (Thailand) Ltd

JQA-1452 September 13, 2002 (ISO 9001)

Daikin Australia Pty Limited (ISO 9001)

QEC 23256 May 31, 2006
 Sydney, Brisbane, Adelaide, Melbourne,
 Newcastle, Townsville, Perth
 CEM 20437 October 27, 2006
 Sydney, Brisbane

DEALER:

www.daikin.com.au

www.daikin.co.nz

Daikin Australia Pty Limited ABN 62 000 172 967 | Email: sales@daikin.com.au | 1300 368 300 (AU) or 0800 324 546 (NZ)